



Technical Data Ash Vessel

Pneumatic Bulk Solids Handling
Document No. CPC-TDS-3080

The Clyde Ash Vessel has been installed across hundreds of Ash Handling applications worldwide.

Particularly well suited to multi-outlet hopper applications normally associated with particulate collectors such as ESPs and Fabric Filters.

This machine offers many advantages due to its compact design and ultra efficient operating and maintenance regime

Phone

+44 01302 552200

Email

sales@clydepc.co.uk

Web

www.clydepc.co.uk




ISO9001 | ISO14001



British Engineering

Physical Layout

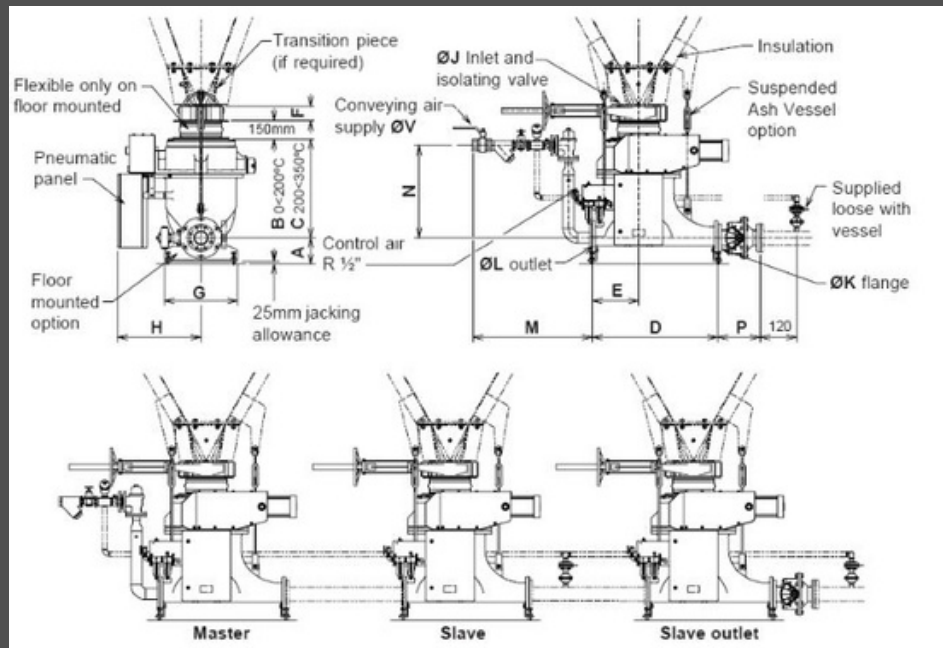

Main Dimensions

Dimensions - (mm) : Apply to PHO - 100°C maximum & PHV - 200°C maximum																	
Model	Ø pipe	A	B	C	D	E	F	G	H	ØJ	ØK	ØL*	M†	N†	P‡	ØV	KG*
1.5/8	80	150	627	647	786	286	92	400	610	200	80	100	730	644	380	50	320
1.5/8	100	150	627	647	786	286	92	400	610	200	100	100	730	644	350	50	320
1.5/12	80	150	694	706	910	355	117	400	725	300	80	100	730	667	380	50	450
1.5/12	100	150	694	706	910	355	117	400	725	300	100	100	730	667	350	50	450
3.0/8	100	260	729	749	1030	380	92	540	736	200	100	125	891	655	350	50	470
3.0/8	125	270	718	738	1030	380	92	540	736	200	125	125	891	648	450	50	470
3.0/12	100	215	808	820	1030	380	117	540	770	300	100	125	828	757	350	50	650
3.0/12	125	245	808	820	1030	380	117	540	770	300	125	125	828	757	450	50	650
5.0/12	125	245	886	898	1105	455	117	700	745	300	125	150	847	760	450	50	700
5.0/12	150	245	886	898	1105	455	117	700	745	300	150	150	847	760	450	50	700
6.0E/8	125	270	1232	1252	1030	380	92	540	736	200	125	125	1110	1150	450	50	520
8.0/12	150	260	1088	1100	1155	480	117	1070	734	300	150	150	930	947	450	50	800
10.0E/12	125	245	1473	1485	1105	455	117	700	745	300	125	150	847	1347	450	50	750
12.0/12	200	300	1133	1145	1350	540	117	910	810	300	200	200	1375	892	486	80	1000

† : Ash Vessel outlet diameter.

‡ : Master vessels only.

* : Slave outlet vessels only.

* : Slave vessels only

* : Ash Vessel outlet diameter. * : Master vessels only. * : Slave outlet vessels only. * : Slave vessels only

Typical Installation

