



Pneumatic Conveying



Technical Data Ash Vessel - Compact

Pneumatic Bulk Solids Handling
Document No. CPC-TDS-3090

The Clyde Ash Vessel Compact has been designed specifically to handle small quantities of coarse material across a wide range of applications.

Originally developed to handle boiler grit from multiple collection points on industrial shell boiler grit arrestors where the collection rate of grit is very small.

Best suited to conveying coarse or fine gritty materials up to around 150m

Phone

+44 01302 552200

Email

sales@clydepc.co.uk

Web

www.clydepc.co.uk




ISO9001 | ISO14001



British Engineering

Physical Layout

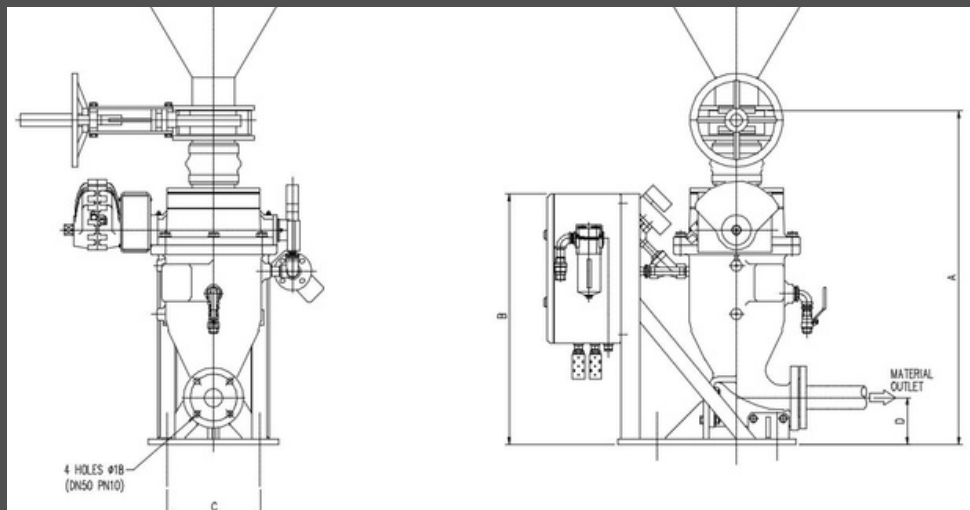

Main Dimensions

COMPACT ASH VESSEL	Inlet Bore (mm)	Outlet Bore (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Approx. Net Weight (kg)
Model 0.4/4	100	50	891	670	250	126	161

Typical Installation

